

# Torch

## Marine grade, Industrial spec, Die hard.

Our LED bulkhead is composed of LM6 marine-grade high-pressure die-cast body and clear polycarbonate diffuser all wrapped up with an IP65 rating and able to withstand temperatures of 40 degrees ambient. Available in 4 different light distributions and standard with a replaceable 10kV surge protection and a high system efficacy of up to 128 lm/w.

Industrial  
IP 65



**SPEC SHEET**

Torch

Raw Lumen up to:	10560 lm
Effective Lumen up to:	8584 lm
<b>240V:</b>	<b>67W</b>
Raw Efficacy:	157 lm/w
Effective Efficacy:	141 lm/w
<b>Max Ta:</b>	<b>40°C</b>
L&B:	L80 B10 40°C 60K hrs

KEY FEATURES

### LENSES

- 4 different optics.

### FRONT COVER

- Impact rating IK08/5J

### TEMPERATURE

- Ambient room temperature -25°C to +40°C.

### MOUNTING OPTIONS

- Surface mounting brackets
- Pole mount
- Pole mount with swivel



Fitting Size: **400 x 280 x 115mm**



**kV Protection:**  
Up to 10kV standard



**COLOUR Temp:**  
5600K  
CR>80 R9>13



**IP 65**  
Indoor & Outdoor



**IK08/5J**  
Front cover:  
IK08/5J




**Construction & Fasteners:**  
Aluminum & SS316



**LM6 Marine Grade Cast Aluminum**

### 4 Distribution Options

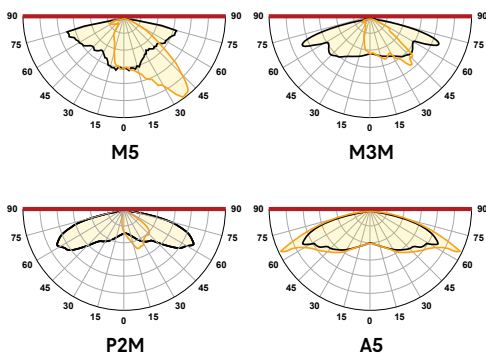

Designed and Manufactured by

**energywise**

Better Light  
Through Research.

sales@energywise.co.za | www.energywise.co.za

T: +27 31 764 2345 / +27 87 941 0012

Physical address: Unit 5 Edstan Business Park, 2 Ibhubesi Road, Riverhorse Valley, Durban, South Africa, 4017

Postal address: PO Box 1166, Kloof, South Africa, 3640

QMS-TCH-EWSP-240510

